



**Connecting Link – Grade 80 - design factor 4:1 - Cert supplied on request**

Grade 80 Chain	WLL lbs	Dimensions (inch)				Wt. Lbs	Pcs box	Part Number
		A	B	D	K			
9/32	4,500	0.71	0.89	0.35	2.25	0.4	100	28-7-8CL
3/8	7,100	0.99	1.06	0.50	2.68	0.7	50	28-10CL
1/2	12,000	1.19	1.38	0.62	3.58	1.5	25	28-13CL
5/8	18,100	1.42	1.51	0.75	3.94	2.4	15	28-16CL
3/4	28,300	1.65	1.81	0.87	4.80	4.2	10	28-18-20CL
7/8	34,200	1.93	2.32	0.94	5.98	6.6	6	28-22CL
1	47,700	2.17	2.44	1.19	6.38	10.4	3	28-26CL
1-1/4	72,300	2.72	3.11	1.42	7.96	19.4	2	28-32CL



**Omega Link – Grade 80 - design factor 4:1 - Cert supplied on request**

Grade 80 Chain	WLL lbs	Dimensions (inch)				Wt. kg	Pcs box	Part Number
		D	K	P	T			
1/4-5/16	4,500	1.06	1.42	0.35	0.44	0.4	80	28-7-8MMOL
3/8	7,100	1.26	1.73	0.47	0.59	0.9	45	28-10MMOL
1/2	12,000	1.65	2.17	0.62	0.67	1.8	20	28-13MMOL
5/8	18,100	1.96	2.72	0.71	0.89	3.3	12	28-16MMOL

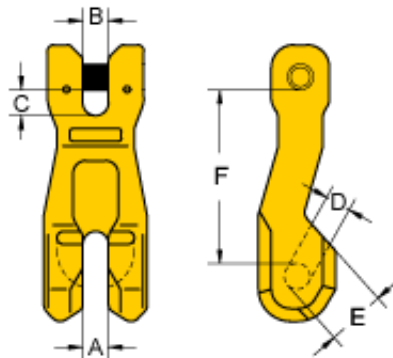

**Clevis Claw Hook, Shortening Clutch – Grade 80 - design factor 4:1 - Cert supplied on request**

Grade 80 Chain	WLL lbs	Dimensions (inch)					Wt. Lbs	Pcs box	Part Number
		A,B	C	D	E	F			
9/32	4,500	0.34	0.39	0.35	0.63	2.44	1.1	50	28-7-8CCH
3/8	7,100	0.49	0.55	0.47	0.98	3.43	2.2	21	28-10CCH
1/2	12,000	0.65	0.67	0.59	1.26	4.53	4.4	10	28-13CCH
5/8	18,100	0.81	0.75	0.75	1.54	5.63	7.1	6	28-16CCH
3/4	28,300	0.85	0.91	0.87	1.81	5.98	10.8	4	28-18-20CCH

**\*\*See Page 14 for Grade 80 Chain\*\***